



**CXF##Ex-B**

P.O. Box 15732  
Brooksville, FL 34604  
Phone: 888-987-8877  
Fax: 888-654-3844  
[www.surgesuppression.com](http://www.surgesuppression.com)

The Coaxial Series devices are designed to protect Data and Signal Transfer circuits, LANs operating Thin Ethernet / ThinNet (10Base2), Token Ring (802.5), 802.3, CCTV, CATV, cable TV, Radio Frequency Receiving Equipment, Coax Satellite Systems, and a wide variety of similar circuits using coaxial connections. This device is connected in series using common F coaxial connectors, making your installation a breeze. A ground lug is provided on the side of the unit to insure a low impedance ground discharge path.

The unique design of these devices makes them among the most versatile SPD devices on the market with superior performance specs and a warranty that is second to none.

#### GENERAL

|                      |  |
|----------------------|--|
| <b>Description:</b>  | Series connected transient voltage surge suppressor with <b>Optimal Response Network™</b> circuitry for use on a wide variety of circuits using coaxial connections.   |
| <b>Application:</b>  | Data and Signal Transfer circuits, LANs operating Thin Ethernet / ThinNet (10Base2), Token Ring (802.5), 802.3, CCTV, CATV, cable TV, Radio Frequency Receiving Equipment, Coax Satellite Systems, and a wide variety of similar circuits using coaxial connections. |
| <b>Warranty:</b>     | <b>25 Years Unlimited Free Replacement</b>   |
| <b>Unit Listing:</b> | UL497B   |

#### MECHANICAL

|                           |   |
|---------------------------|---|
| <b>Enclosure:</b>         | Die-cast aluminum alloy (Shielded) case   |
| <b>Connection Method:</b> | Input: female, Output: female, Ground: #10 threaded stud, Optional DIN mounting foot. |
| <b>Shipping Weight:</b>   | < 1 lb  |

#### CIRCUITRY


|                          |   |
|--------------------------|---|
| <b>Circuit Design:</b>   | Series wired, hybrid, low capacitance design using our <b>Optimal Response Network™</b> design to provide the lowest possible Let-Through-Voltages. |
| <b>Protection Modes:</b> | L-G (Common Mode)   |

#### PERFORMANCE


|   |                            |
|---|----------------------------|
| <b>Maximum Continuous Operating Voltage:</b>          | 7.5, 24, 36, 62, and 200 V |
| <b>Maximum Continuous Operating Current:</b>          | 500 mA                     |
| <b>Frequency Range:</b>                               | DC (0 Hz.) Up to 1.5 GHz   |
| <b>Data Signal Rate Range:</b>                        | 0 to 150 Mbps              |
| <b>Series Resistance:</b>                             | 2 Ohms                     |
| <b>Characteristic Line Impedance (Z<sub>0</sub>):</b> | 50 Ohms, resistive         |
| <b>Insertion Loss:</b>                                | < 3 dB, DC to 1.5 GHz.     |
| <b>Application Range:</b>                             | 50 – 75 Ohms, typical.     |
| <b>Peak Surge Current per coaxial cable:</b>          | 10 kA PSC (L-G)            |

| Maximum Continuous Operating Voltage Current and Maximum Data Transmission Rate |       |        |                                |                 |
|---|-------|--------|--------------------------------|-----------------|
| Model   | MCOV  | MCOC   | Maximum Data Transmission Rate | Frequency Range |
| CXF5Ex-B  | 7.5 V | 500 mA | ≤ 150 Mbps                     | ≤ 1.5 GHz       |
| CXF12Ex-B   | 24 V  |        |                                |                 |
| CXF24Ex-B   | 36 V  |        |                                |                 |
| CXF48Ex-B   | 62 V  |        |                                |                 |
| CXF140Ex-B  | 200 V |        |                                |                 |

**Single Port Coax Model – E1**

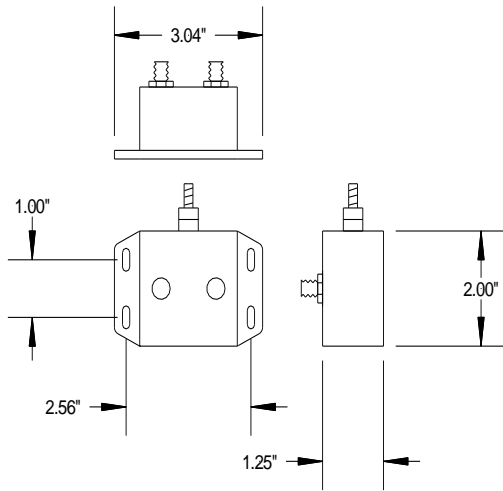

**Dual Port Coax Models – E2**

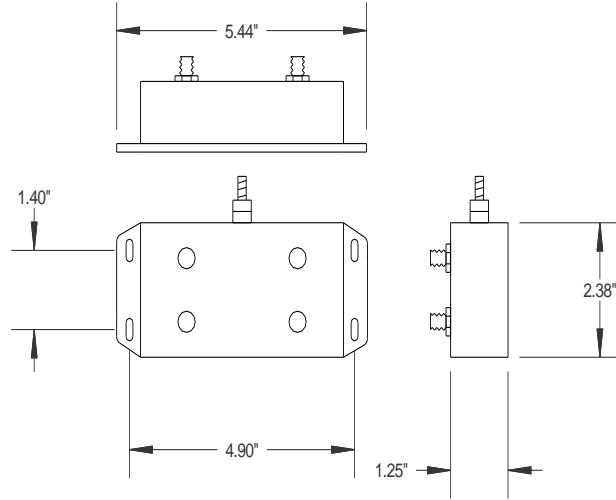

Actual unit may vary from units pictured