

T2RJ45###C8SIDDIN-B

Network Circuit protection device with Discrete All-Mode Protection



PO Box 15732
Brooksville, FL 34604
Phone: 888-987-8877
Fax: 1-888-987-8877
www.surgesuppression.com

The Series T2RJ45###C8SIDDIN-B devices are designed to protect data transmission circuits. These devices are intended for installation as close to the electrical power source of the equipment as possible so as to allow for a common point for grounding.

This device provides protection to all 8 lines (4 pairs) through the RJ45 connectors provided. A ground lug is provided on the top of the unit to insure a low impedance ground discharge path.

The unique design of these devices makes them among the most versatile SPD devices on the market with superior performance specs and a warranty that is second to none.

GENERAL

Description:	Series wired transient voltage surge suppressor with Optimal Response Network™ circuitry for protection of data circuits.
Application:	Designed for use on data, signal and current loop circuits to protect data transmission system equipment from damaging transients generated between terminals and equipment in the data collection/transmission system.
Warranty:	25 Years Unlimited Free Replacement
Unit Listing:	Listed to UL497B

MECHANICAL

Enclosure:	Plastic, UL 94-5VA
Mounting:	DIN rail mounting foot
Connection Method:	RJ45 modular connectors
Shipping Weight:	< 1 lbs

CIRCUITRY


Circuit Design:	Series wired hybrid design incorporating discrete all mode protection and utilizing our Optimal Response Network™ design to provide lowest possible let-through voltages. All suppression circuits are encapsulated in our high dielectric compound to promote long component life and protection from the environment and/or vibration.
Protection Modes:	Dedicated protection components and circuitry for each mode. Discrete L-L (Normal Mode) and L-G (Common Mode)

PERFORMANCE

Maximum Continuous Operating Voltage:	See Table on back
Maximum Continuous Operating Current:	500 mA
Series Resistance:	6-10 Ohms per wire
Maximum Data Rate:	100 Mbps
Peak Surge Power per pair:	150 A per mode (8 x 20 μ sec).

**Let-Through Voltages Using ANSI/IEEE C62.45 & C62.41.2 Test Environment:
Static, positive polarity. All voltages are peak ($\pm 10\%$).**

Model	Nominal System Operating Voltage (Vnom)	Mode	Maximum Continuous Operating Voltages	Maximum Continuous Operating Current	Peak Surge Current	10 x 1,000 μ s, Impulse waveform
T2RJ455C8SIDDIN-B	5 V	L-G L-L	6 V 12 V	500 mA	150 A	< 20 V < 40 V
T2RJ4512C8SIDDIN-B	12 V	L-G L-L	25 V 50 V	500 mA	150 A	< 30 V < 60 V
T2RJ4524C8SIDDIN-B	24 V	L-G L-L	25 V 50 V	500 mA	150 A	< 60 V < 120 V
T2RJ4548C8SIDDIN-B	48 V	L-G L-L	58 V 116 V	500 mA	150 A	< 90 V < 180 V
T2RJ45140C8SIDDIN-B	140 V	L-G L-L	220 V 440 V	500 mA	150 A	< 250 V < 500 V

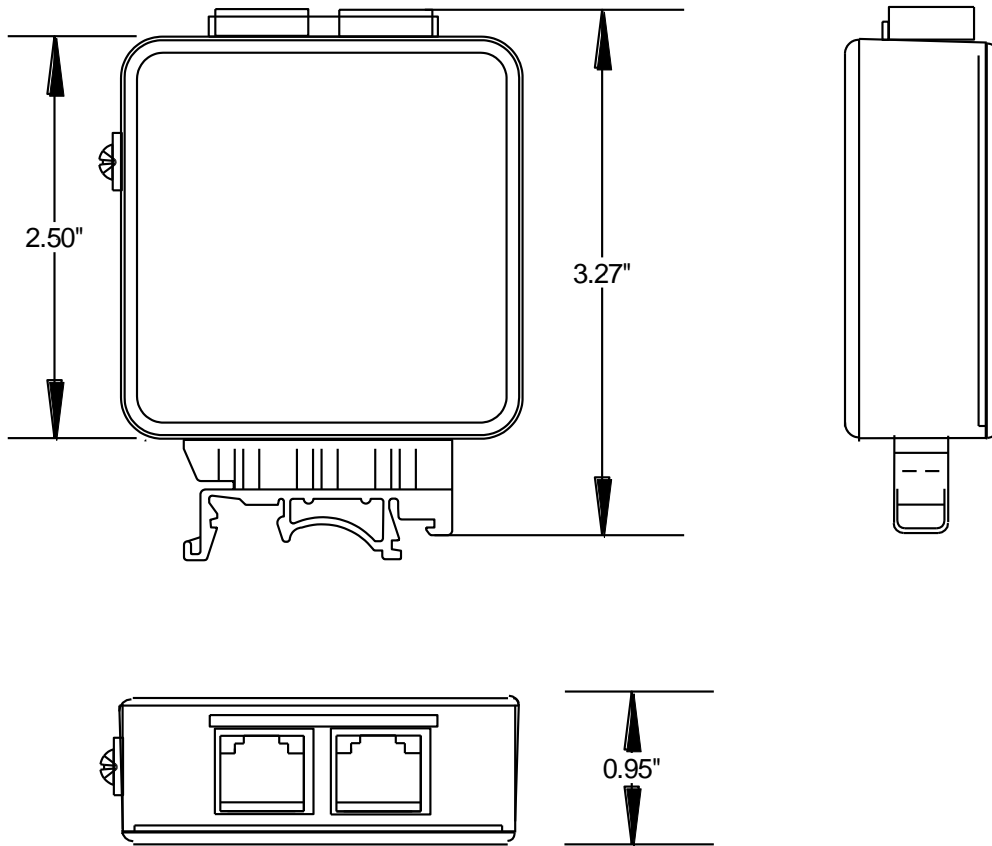

Actual unit may vary from picture.